


## PRICE

inicie sesión para ver precios

## FEATURES

Peso Bruto:	<b>31 lb</b>
Altura (con embalaje):	<b>74 inch</b>
Longitud (con embalaje):	<b>7 inch</b>
Anchura (con embalaje):	<b>19 inch</b>

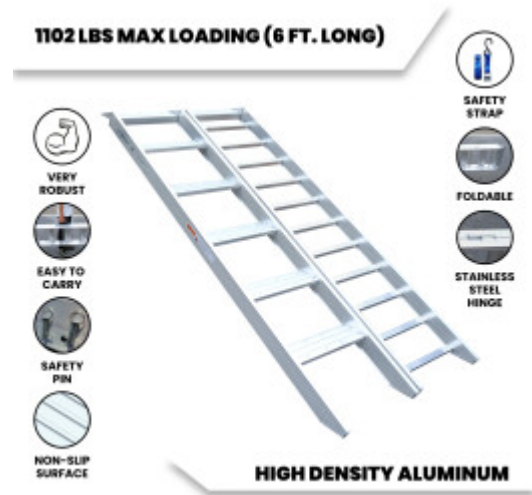

## DESCRIPTION

A very unique and high quality product, allowing to walk beside your motorcycle when you are loading or unloading it. This product was developed to ensure the safety of the person and eliminate the possible damage to a motorcycle during the loading/unloading phase. Ramp is foldable in length and is equipped with comfortable carry handle to facilitate the handling & transportation. Folded product dimensions are: 6' x 1' 4" x 7" ., Weight: 27 lbs., Max loading: 1102 lbs., Technical details: Length: 6 ft., Width (unfolded): 2' 9" ., Weight: 27 lbs ., Ramp thickness / Depth: 3" ., Number of walking: 5 steps with spacing (center to center of the step) of 12" ., Step depth: 4" ., spacing for motorcycle rungs is 6" ., The ramp is designed to support a weight of 1102 lbs (this is a total combined weight of the person and the motocross/motorcycle ). High precision and quality welding procedures guarantee the longevity of the product. Safety precautions and tie down features: This ramp can be secured from sliding either by: a) strap (supplied) or either by using b) couple metal pins which prevent the sliding of the upper part of the ramp. When option "b" is preferred, depending on the situation, 2 holes might be required to be drilled in the supporting surface for insertion of the metal locking pins. The surface of the ramp is anti-slip, adapted to be used in wet weather conditions.